
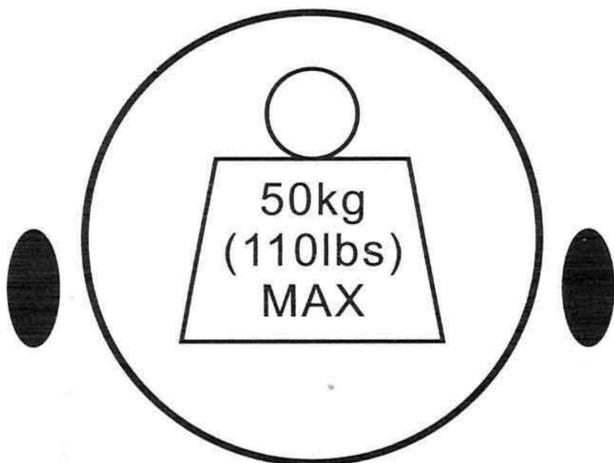


INSTALLATION INSTRUCTIONS

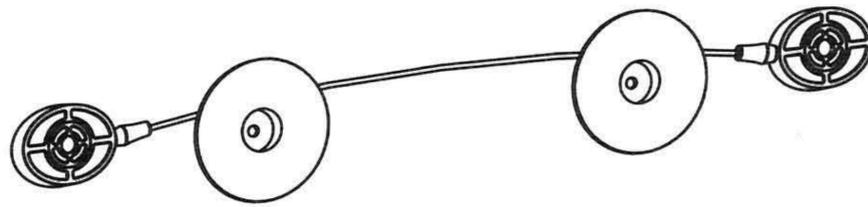

LED WALL MOUNT

Model: LED-01

Max Load Capacity: 50kg(110lbs)


NOTE: Read entire instruction sheet before you start installation and assembly.

⚠ WARNING


- Do not begin to installation of the product on you have read and understand the instructions and warnings contained in this Installation Sheet. If you have any question regarding any of the instruction or warning, Please contact your local distributor.
- Please refer to manufacturer's installation guide recommendation for required distance from wall to avoid risk of property damage.
- This product should only be installed by someone of good mechanical aptitude, with experience and basic building, and fully understands.
- Make sure that the supporting surface will safely support the combined load of the equipment and all attached hardware and components.
- Never exceed the Maximum Load Capacity.
- Always use an assistant or mechanical lifting equipment to safely lift and position equipment.
- Tighten screws firmly, but do not over tighten. Over tightening can damage the items, greatly reducing their holding power.
- This products intended for indoor use only. Use of this product outdoors could lead to product failure and personal injury.

Component Checklist


IMPORTANT: Ensure you have received all parts against the component checklist prior to installing. If any parts are missing or faulty, telephone the special franchiser for a placement.

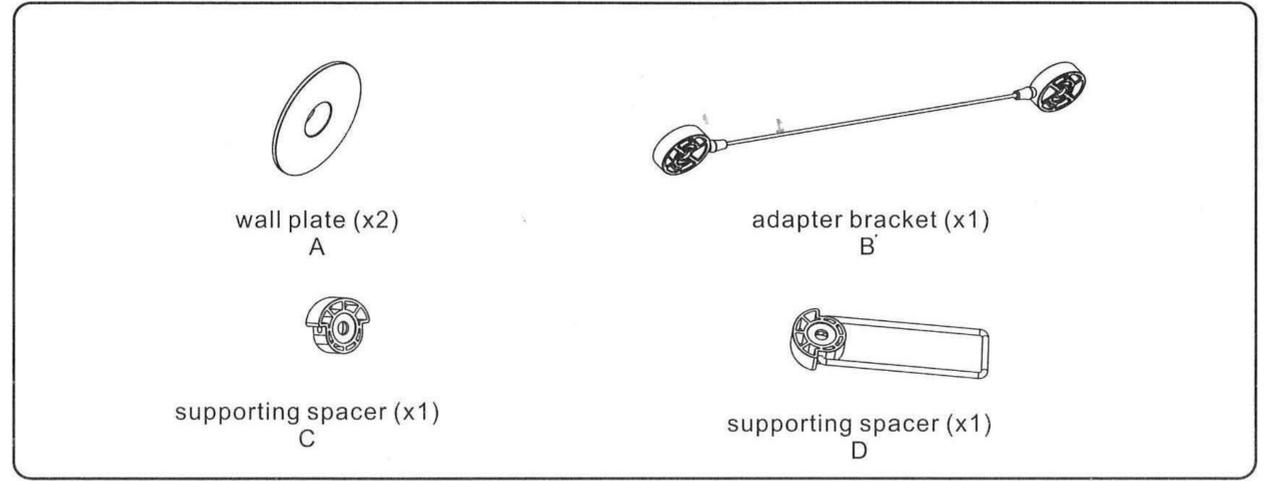

Package M

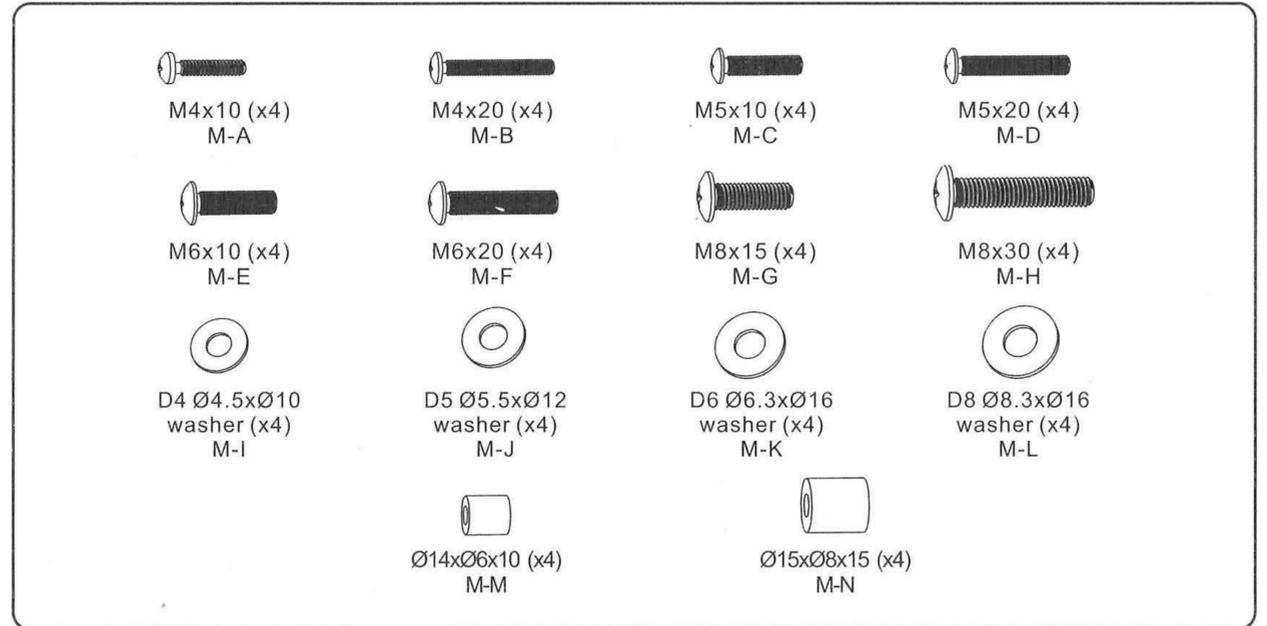

Package W

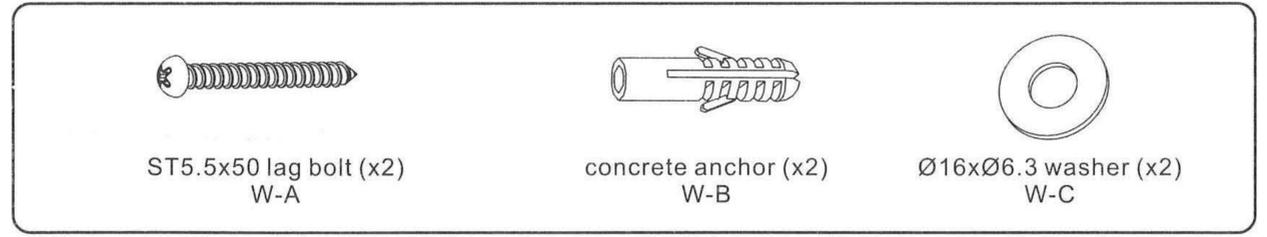

Tools required

- Phillips Head Screw driver(200mm length exclude the handle)
- Electric drill and 8mm masonry bit for concrete wall installation
- Marking Pen
- Hammer

1 SOLID BRICK AND CONCRETE BLOCK MOUNTING:

⚠ WARNING

- When installing wall mounts on cinder block, verify that you have a minimum of 1-3/8" of actual concrete thickness in the hole to be used for the concrete anchors. Do not drill into mortar joints! Be sure to mount in a solid part of the block, generally 1" minimum from the side of the block. It is suggested electric drill on slow setting is used to drill the hole instead of a hammer drill to avoid breaking out the back of the hole when entering a void or cavity.

- Installer must verify that the supporting surface will safely support the combined load of the equipment and all attached hardware and components.

- Use the Wall Plate as a template to mark 2 holes locations on the wall, make sure the mounting hold at the same level, as shown in fig. 1.1.
- Pre-drill these holes with a 8mm masonry bit to at least 50mm in depth. Insert a Concrete Anchor (W-B) into each of these holes. Attach the Wall Plate to the wall using 2 Lag Bolts (W-A) and 2 M6 Washers (W-C), as shown in fig. 1.1.

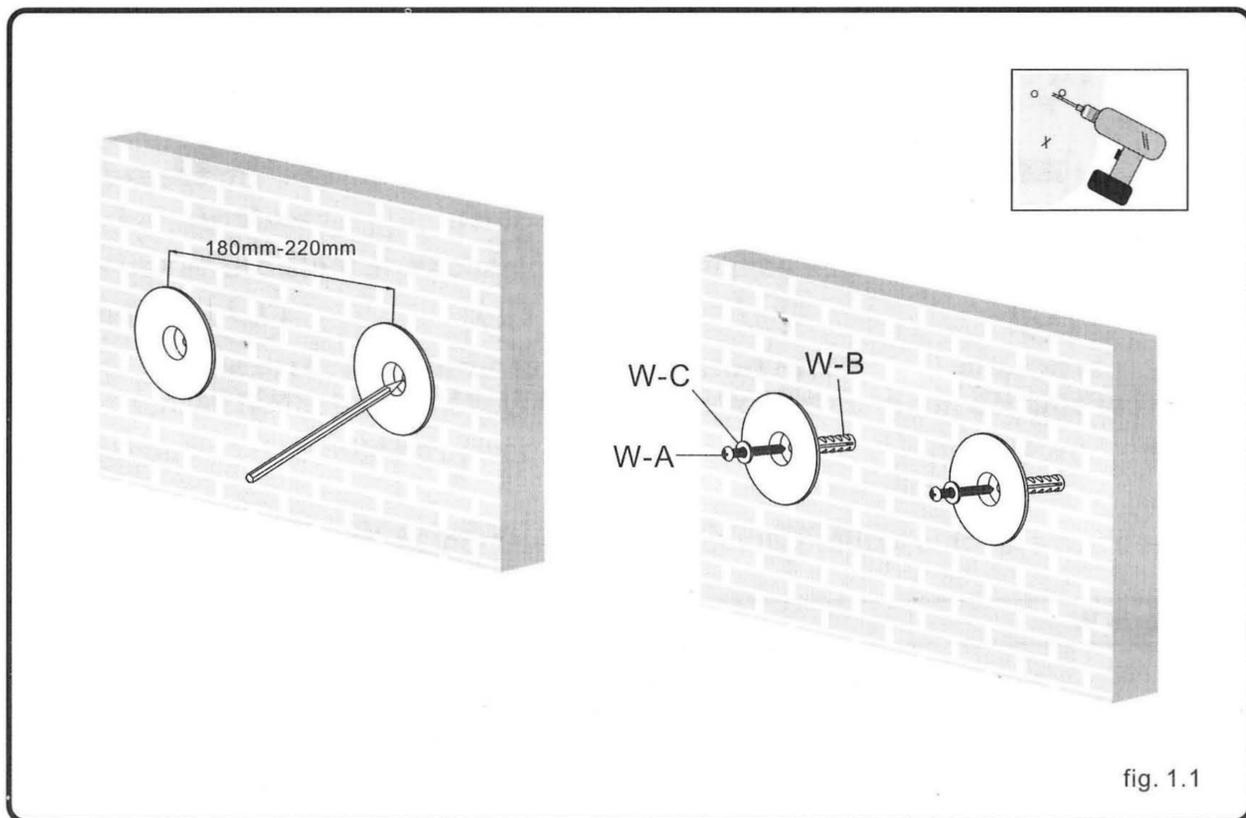


fig. 1.1

2 Installing Adapter Brackets

- To prevent scratching the screen, set a cloth on a flat, level surface that will support the weight of the screen.
- Place screen face side down. Place adapter bracket and supporting spacer on the back of screen, align to holes, as shown in fig. 2.1.
- Attach the adapter brackets and supporting spacer to the back of the screen using the appropriate combination of screws, washers, and spacers, as shown in fig. 2.2, fig. 2.3 and fig. 2.4.

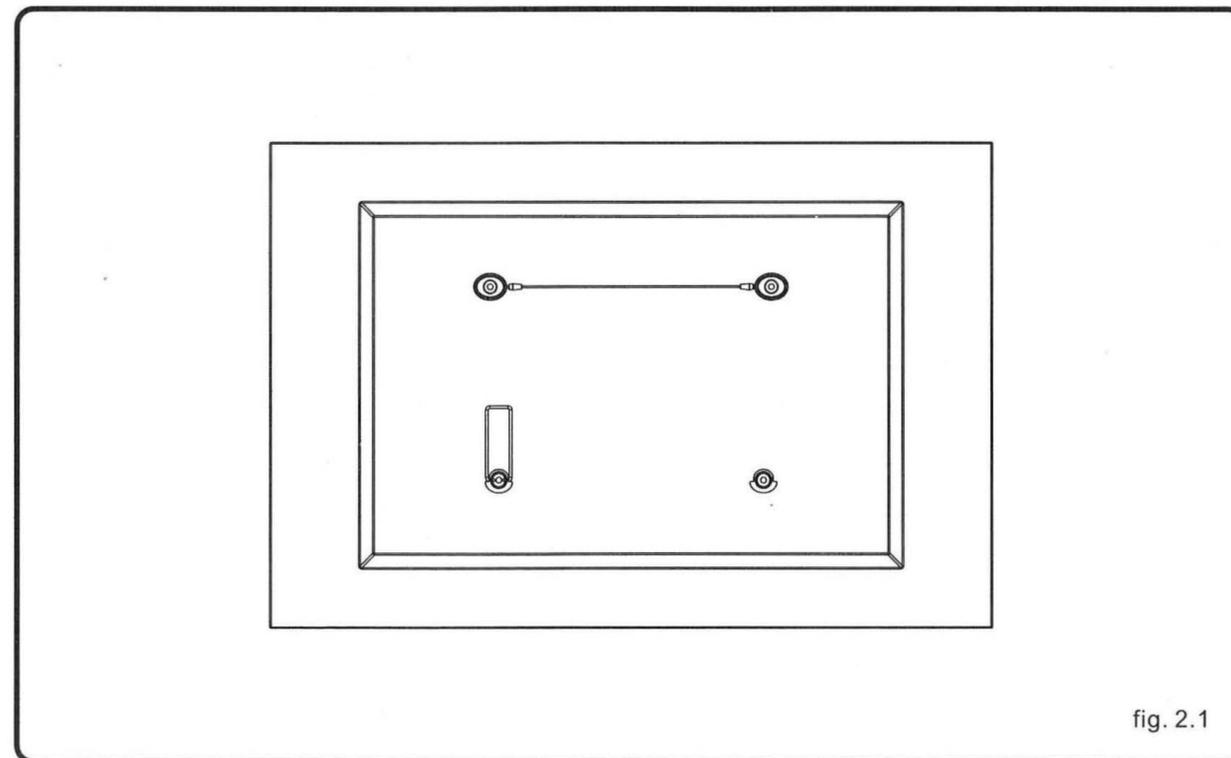


fig. 2.1

NOTE: For flat back screens proceed to step 2-1. For bump-out or recessed back screen skip to step 2-2.

2-1 For Flat Back Screen

- Begin with the shortest length screw, hand thread through washer and adapter bracket into screen as shown below.
- Screw must make at least three full turns into mounting hole and fit snug into place. Do not over tighten.
- If screw cannot make three full turns into screen, select a longer length screw from the baffled fastener pack. Repeat for remaining mounting holes, level brackets and tighten screws.

NOTE: Spacer may not be used, depending upon the type of screen.



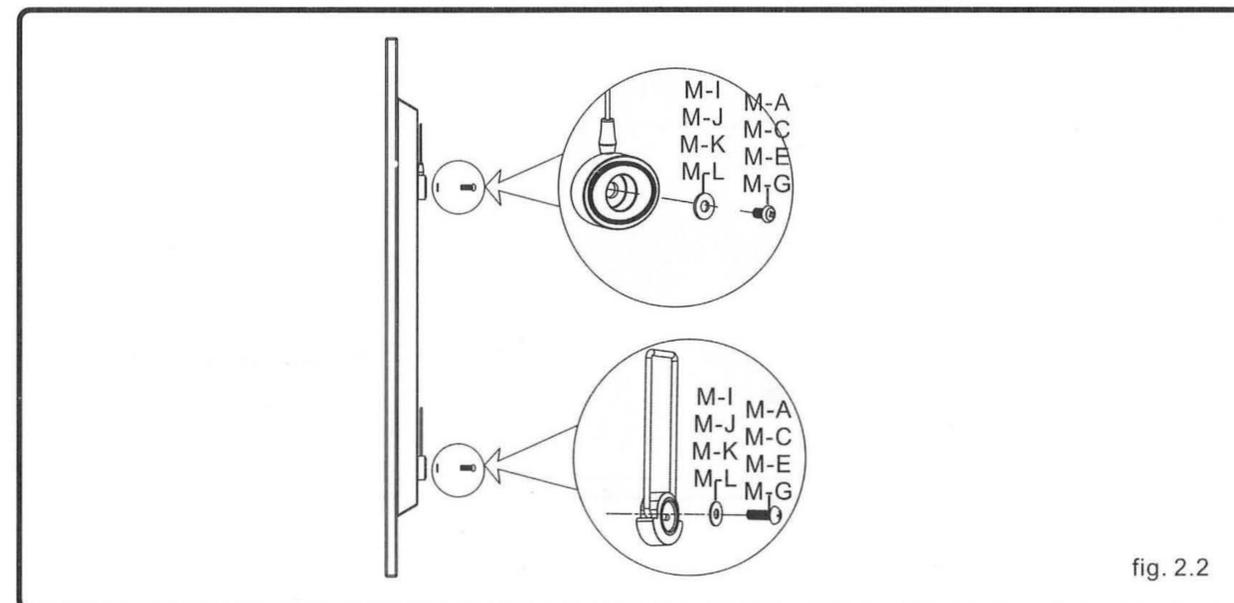


fig. 2.2

2 For Bump-out or Recessed Back Screen


Begin with longer length screw, hand thread through washer, the supporting spacers and sliders into screen as shown below. Screw must make at least three full turns into mounting hole and fit snug into place. Do not over tighten. If screw cannot make three full turns into screen, select a longer length screw from the baffled fastener pack. Repeat for remaining mounting holes and tighten screws.

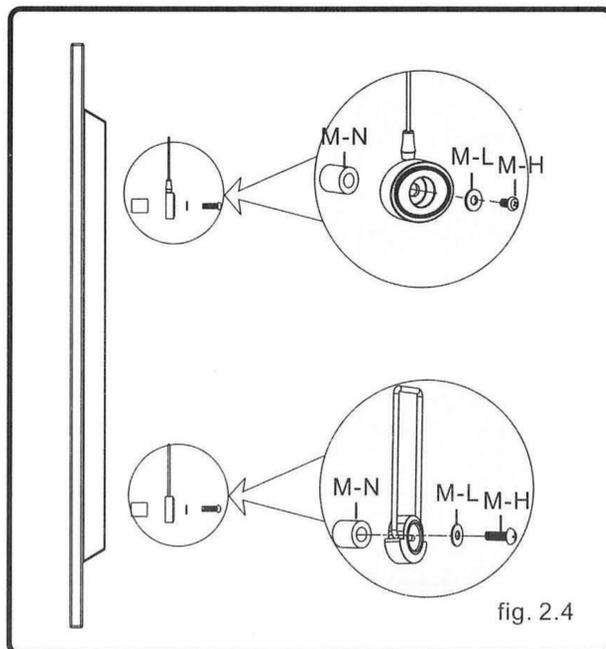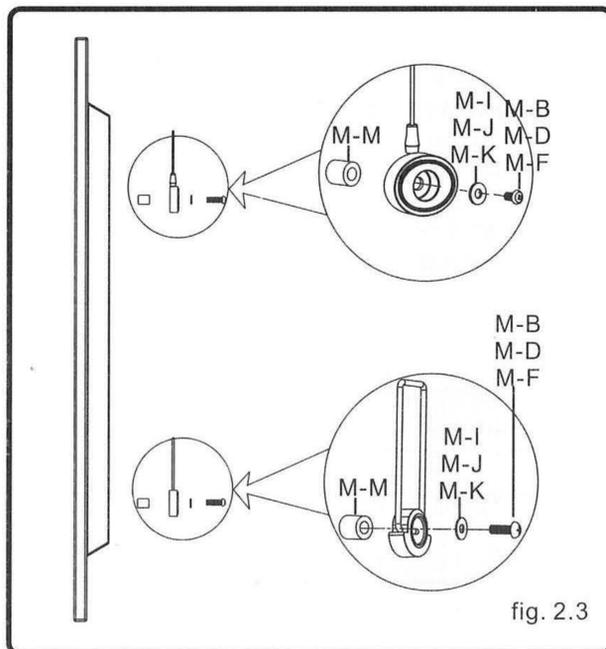

3 Hang the brackets mounted TV onto the wall plate


Warning: A minimum of two qualified people are required for this operation.

- After the wall mount has been safely secured to the wall, with 2 people carefully lift your TV and hook the top hooks over the top of the wall plate rail. , see fig. 3.1.

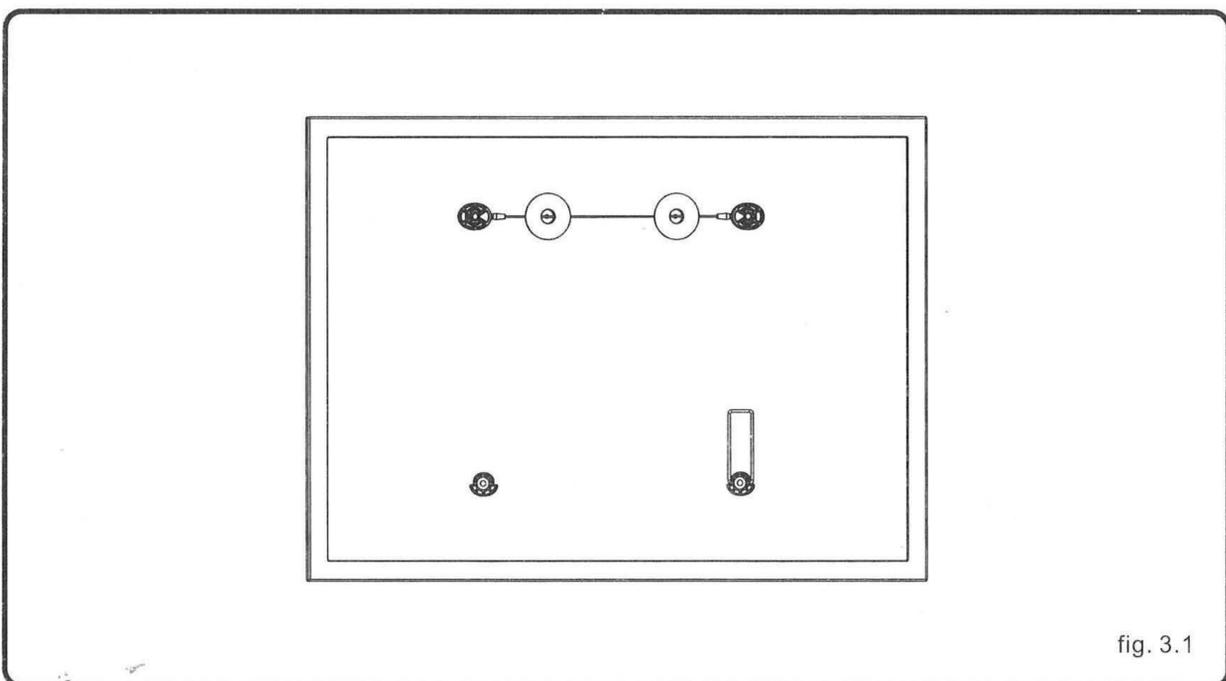

4 Cable Management

- Slowly pull bottom of display away from wall until kick stand of the supporting spacer(D) fully reaches its down position.
- Attach or adjust cables as necessary on back of display.
- To disengage kick stand, slightly pull display away from wall. Slowly allow display to return to the wall.

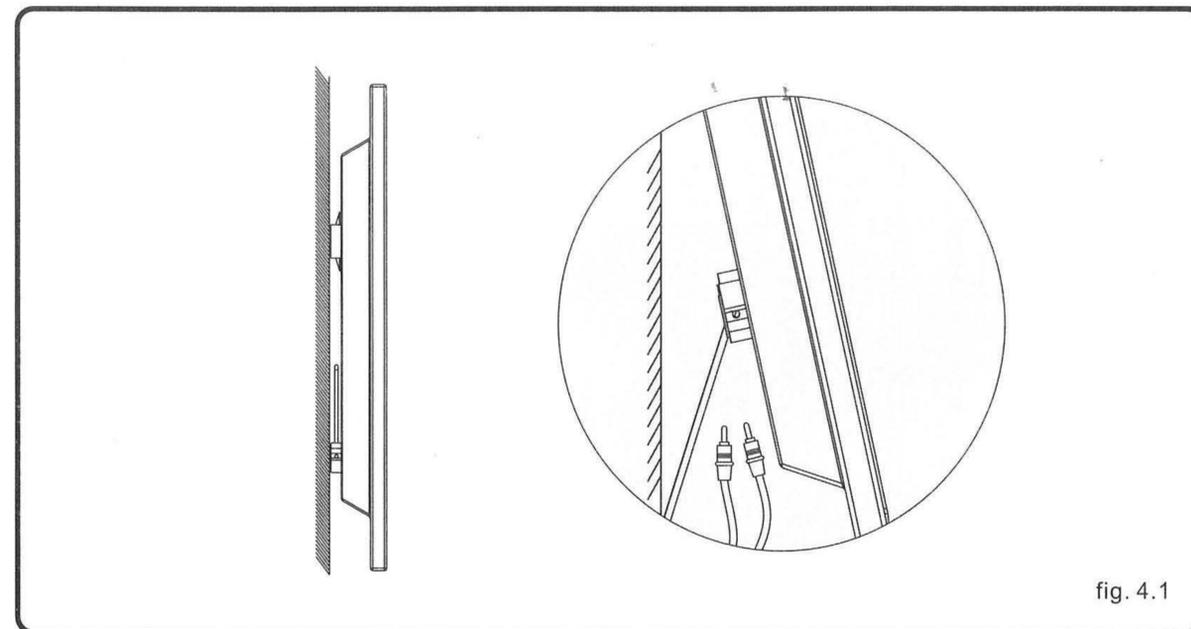

Maintenance

Once you have mounted the bracket and the flat screen, check that they are sufficiently secure and safe to use. You should check whether screws are fixed well each two months. If you have any doubts regarding the installation, please consult our retailer or service department for detail.